


DehuKing



MODEL DU04T05CK126-1010-3 Staged Dehumidification Energy Saver

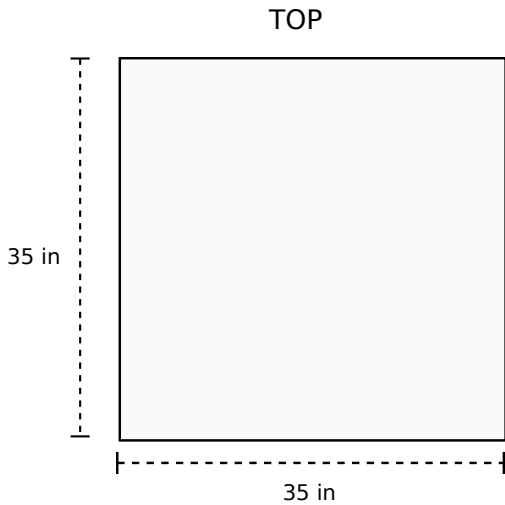

SPECIFICATIONS:



- 4 ton dehumidifier
- Performance: 1030 pints @ 80F and 60% relative humidity
- 5.42 gallons per hour, 130 gallons per day
- 10.58 pints per KW
- Electrical: 208/230V, 60hz Three phase
- Minimum Circuit Ampacity: 17.1, Maximum Fuse Size 30 Amps
- R410a Refrigerant
- Two 24,000 BTU/HR compressors
- CFM: 2,000
- Dimensions: 35" wide, 35" long, 20-1/4" tall
- Weight (LBS): 311
- Decibels: 84

ADDITIONAL FEATURES:

- Dual Dehumidistats stage process
- For suspending in Greenhouse, four easy access all thread mounts

FRONT SIDE EXPOSED

REAR SIDE EXPOSED

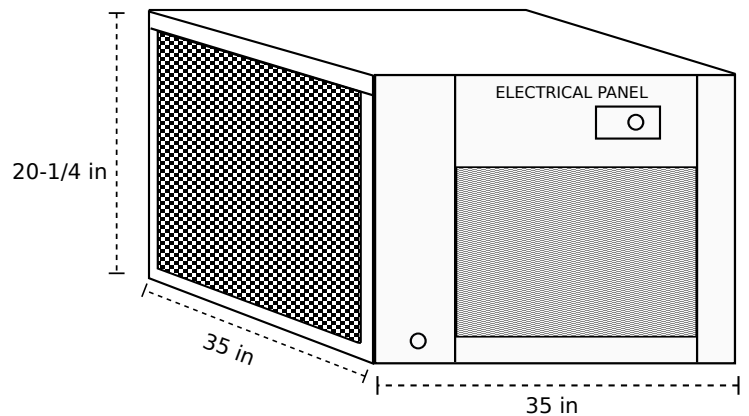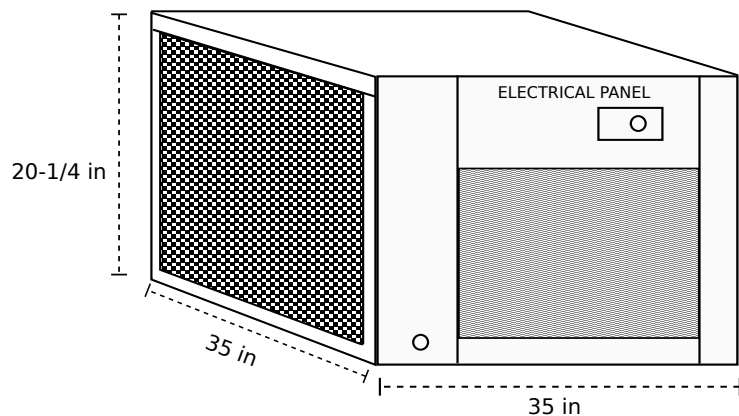

*EACH OPPOSITE SIDE IDENTICAL