






## 20 TON FULL FUNCTION REMOTE DEHU

### MODEL RDU20T29CK696-4

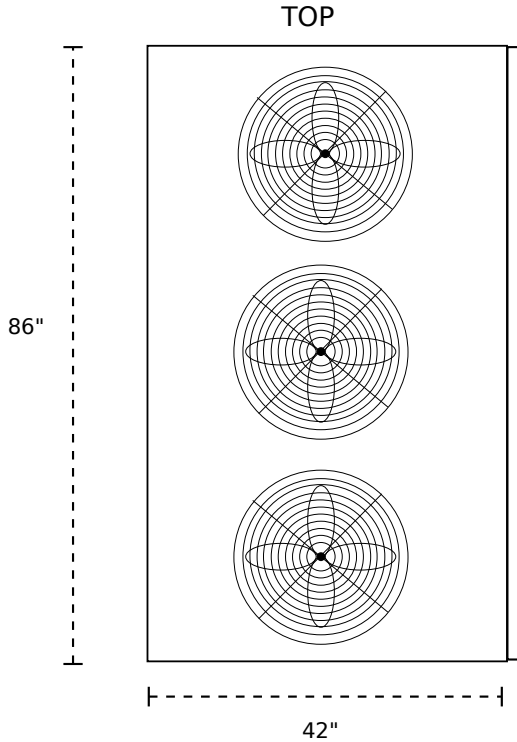

#### SPECIFICATIONS:

- 20 ton dehumidifier
- Performance: 27.8 gallons per hour @ 80F and 60% relative humidity
- 29 gallons per hour, 696 gallons per day
- 12.62 pints per KW
- Electrical: 460-480V, 60hz three phase
- Minimum Circuit Ampacity: 39, Maximum Fuse Size 54 Amps
- Two Remote Condensers each at Minimum Circuit Ampacity: 22 Amps, Maximum Fuse Size 35 Amps
- R410a Refrigerant
- Two remote condensers, specs on next page
- Scroll Compressor, specs on next page
- CFM: 6,000
- Dimensions:
  - Inside unit 86" wide, 42" long, 77" tall
  - Outside remote units (2) each 35-1/2" wide, 35-1/2" long, 38-1/4" tall
- Decibels: 84
- Weight (lbs): 1705; w/ skeletal crate 1825; w/ closed crate 2155

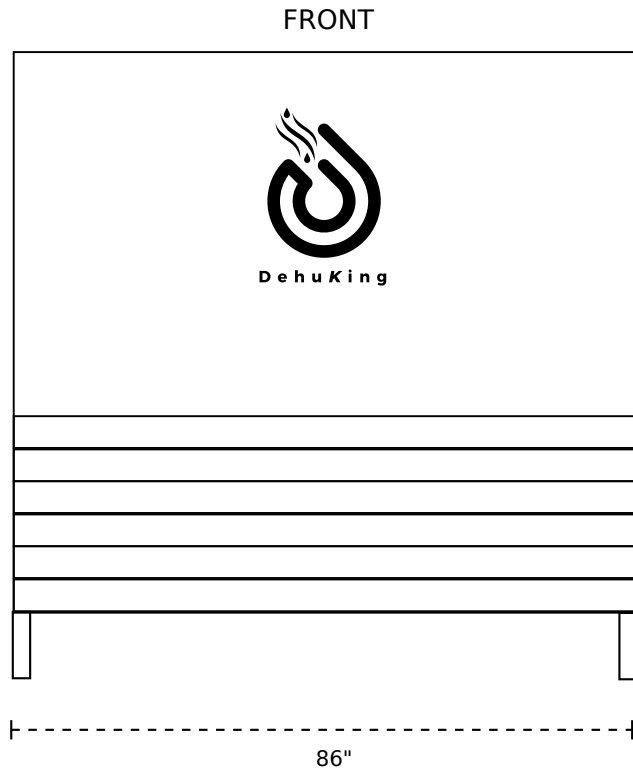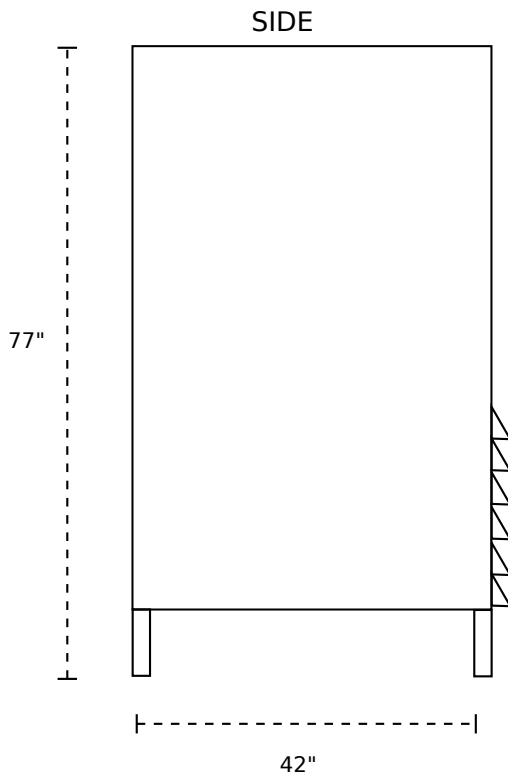




TOP

## 20 TON FULL FUNCTION DEHU

### MODEL RDU20T29CK696-4

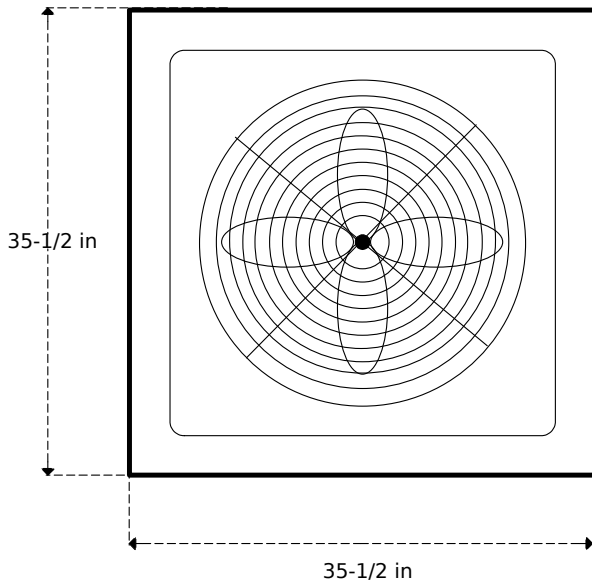

- Two remote condensers each:
- Electrical: Voltage range 460-480V
- Minimum Circuit Ampacity: 22 Amps, Maximum Fuse Size 35 Amps
- Each with 120,000 BTU/HR Copeland scroll compressor
- Dimensions (each): 35-1/2" wide, 35-1/2" long, 38-1/4" tall
- Approximate shipping weight (LBS): 301 each
- Decibels: 72

FRONT

REAR

